


● VINYL FLOOR TILES

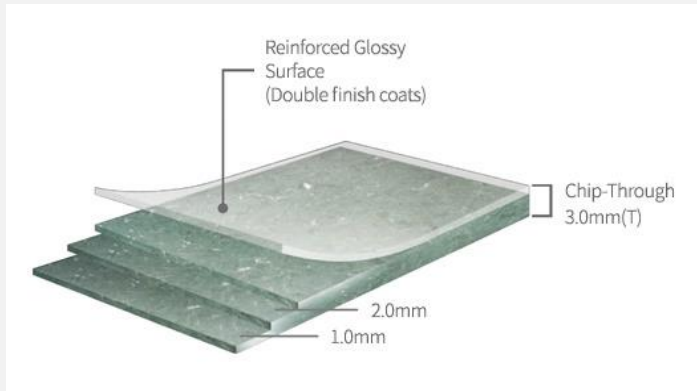

• TECHNICAL DATA

Standard Vinyl Composition Tile

ASTM F 1066, Comp 1, Class 2 Through pattern

ASTM E 648, Critical Radiant Flux:  $>0.45\text{W}/\text{cm}^2$

ASTM E 662, Smoke Density:  $<300$

ASTM E 84, Flame Spread:  $<25$ , NFPA Class A, UBC1

ASTM F 970, Static Load Limit: 150PSI(10.54kg/cm<sup>2</sup>)

ADA requirement, Slip resistance:  $>0.6$

Recycled contents: Min 10% post and pre-consumer

Comply with Korean Standard KS M 3802,

USA ASTM C 1066, Japanese Standard JIS A 5705

• SPECIFICATION

- Thickness : 2.0mm, 2.5mm, 3.0mm

- Dimension : Deluxe 300mm x 300mm

Super Deluxe 450mm x 450mm

